

## TEST REPORT

REPORT NO.: HV-14-00674XA

PAGE: 1

OF

REPORT DATE: Feb. 21, 2014

#### JER YEU INDUSTRIAL CO., LTD.

NO.367, SEC.3, ZHONGSHAN RD., TANZI DIST., TAICHUNG CITY, TAIWAN

The following merchandise was submitted and identified by the vendor as:

Style/Item No.:

J 6-3 SILICONE FOIL AND FABRIC AIR HOSE

Country of Origin:

Taiwan

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Required: (According to client's test specification, please see following sheets in detail.)

20 mm Vertical Burning Test

Test Result:

-PLEASE SEE ATTACHED SHEETS-

Date of Receive:

**FEBRUARY 12, 2014** 

Date of Testing:

FEBRUARY 12, 2014 ~ FEBRUARY 21, 2014

Signed for and on behalf of SGS Taiwan Ltd.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's finite time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or ralsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



## **TEST REPORT**

REPORT NO.: HV-14-00674XA

PAGE:

2

REPORT DATE: Feb. 21, 2014

## 20 mm Vertical Burning Test

Test Equipment:

Name	Brand	Model
150mm Dial Calipers	Mitutoyo	505-681
Horizon Vertical Flame Chamber	ATLAS	HVUL2

Lab Environmental Conditions:

Ambient temperature:

23±2°C

Relative humidity:

50±5%RH

Test Method:

Refer. to UL94 (1996)

Test for Flammability of Plastic Materials for Parts in

Devices and Appliances

Test Condition:

Conditioning 1:

Specimens are to be preconditioned at 23±2°C and

50±5% percent relative humidity for 48 hours

Conditioning 2:

Specimens are to be preconditioned in an air-circulating

oven for 168 hours at 70±1°C and then cooled in the desiccator for at least 4 hours at room temperature

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from alteration, forgery or falsification of the content or appearance of this document annot be reproduced except in full, without prior written approval of the Company. Any unauthorized shown in this test report refer only to the sample(s) tested.



## **TEST REPORT**

REPORT NO.: HV-14-00674XA

3 OF 4

REPORT DATE: Feb. 21, 2014

### Test Data:

Conditioning 1(Temperature 23±2°C, Relative humidity 50±5%, 48 hours)

Criteria conditions	Specimen					Requirements		
	1	2	3	4	5	V-0	V-1	V-2
Thickness(mm)	0.30	0.30	0.29	0.30	0.29			-
Afterflame time for each individual specimen t1(Sec)	5.4	4.3	1.6	2.8	3.5	≦10	<b>≦</b> 30	≦30
Afterflame time for each individual specimen t2(Sec)	0	0	0	0	0	<b>≦</b> 10	<b>≦</b> 30	≦30
Total afterflame time (Sec) (t1 plus t2 for the 5 specimens)	17.6					es comes per a lace	espective as y	
Afterflame plus afterglow time for each individual specimen after the second flame application(t2+t3) (Sec)	1.1	1.0	1.2	1.2	1.0	≦30	≦60	≦60
Afterflame or afterglow of any specimen up to the holding clamp	No	No	No	No	No	No	No	No
Cotton indicator ignited by flaming particles or drops	No	No	No	No	No	No	No	Yes

### Conditioning 2(Temperature 70±1°C, 168 hours, Cooled 4 hours at room temperature)

Criteria conditions	Specimen				Requirements			
	1	2	3	4	5	V-0	V-1	V-2
Thickness(mm)	0.29	0.29	0.29	0.30	0.30	-	****	
Afterflame time for each individual specimen t1(Sec)	1.4	2.4	5.6	1.7	2.2	<b>≦</b> 10	≦30	<b>≦</b> 30
Afterflame time for each individual specimen t2(Sec)	0	0	0	0	0	≦10	≦30	<b>≦</b> 30
Total afterflame time (Sec) (t1 plus t2 for the 5 specimens)	13.3					lad) et teord leed af wases	ge nodê bew. Node yekîşey	damay sama kandi dhak
Afterflame plus afterglow time for each individual specimen after the second flame application(t2+t3) (Sec)	1.0	1.2	1.0	1.0	1.1	≦30	≦60	<b>≦</b> 60
Afterflame or afterglow of any specimen up to the holding clamp	No	No	No	No	No	No	No	No
Cotton indicator ignited by flaming particles or drops	No	No	No	No	No	No	No	Yes

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's single responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. 
 SGS Taiwan Ltd.
 35, Wu Chyuan Road, (New Taipei Industrial Park.) Wu Ku District, New Taipei City, Taiwan /新北市五股區(新北產業園區)五權路35號台灣檢驗科技股份有限公司

 1
 (886-2) 2298-3355
 f (886-2) 2299-7857
 www.sgs.tw




# **TEST REPORT**

REPORT NO.: HV-14-00674XA

4 OF

REPORT DATE: Feb. 21, 2014

## Test Photo:

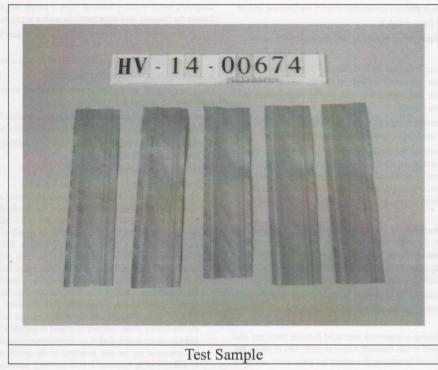

---- 0 0 0 -----

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an